

## 2x2B Optical Switch

### Features:

- ◆ Low Insertion Loss
- ◆ Wide Wavelength Range
- ◆ Low Crosstalk
- ◆ High Stability, High Reliability
- ◆ Epoxy-free on Optical Path
- ◆ Latching and Non-latching

### Applications:

- ◆ R&D in Laboratory
- ◆ System Monitoring
- ◆ OADM
- ◆ MAN (Metropolitan Area Network)

### General:

HE-2x2B Optical Switch, which is famous for its high performance, low insertion loss and compact dimension: (L) 27.0×(W) 12.6×(H) 8.2mm. It is an ideal component for OADM, OXC, system monitoring and protection.


With compact package, it can be easy to integrate into a high density optical communication system.

**Specifications:**


Parameters	Unit	HE-2x2B	
Wavelength Range	nm	850±40 / 1300±40	1260 ~ 1650
Test Wavelength	nm	850 / 1300	1310 / 1550
Insertion Loss <sup>Note 1, 2</sup>	dB	Typ.: 0.8    Max.: 1.2	Typ.: 0.6    Max.: 0.8
Return Loss <sup>Note 1, 2</sup>	dB	MM ≥ 30	SM ≥ 50
Crosstalk <sup>Note 1</sup>	dB	MM ≥ 35	SM ≥ 55
PDL	dB	≤0.05	
WDL	dB	≤0.25	
Repeatability	dB	≤±0.02	
Operating Voltage	V	3.0 or 5.0	
Durability	Cycles	≥ 10 Million	
Switching Time	ms	≤8	
Optical Power	mW	≤500	
Operating Temperature	°C	-20 ~ +70	
Storage Temperature	°C	-40 ~ +85	
Relative Humidity	%	5 ~ 95	
Weight	g	14	
Dimension	mm	(L)27.0×(W)12.6×(H)8.2 ±0.2	
<b>Note:</b> 1, Within operating temperature and SOP. 2, Excluding connectors.			

**Pin Configurations:**

Type	State	Optical Route	Electric Drive				Status Sensor			
2x2B			Pin 1	Pin 5	Pin 6	Pin 10	Pin 2-3	Pin 3-4	Pin 7-8	Pin 8-9
Latching	A	P1-P3	--	--	GND	V+	Close	Open	Open	Close
	B	P1-P4, P2-P3	V+	GND	--	--	Open	Close	Close	Open
Non-latching	A	P1-P3	--	--	--	--	Close	Open	Open	Close
	B	P1-P4, P2-P3	V+	--	--	GND	Open	Close	Close	Open

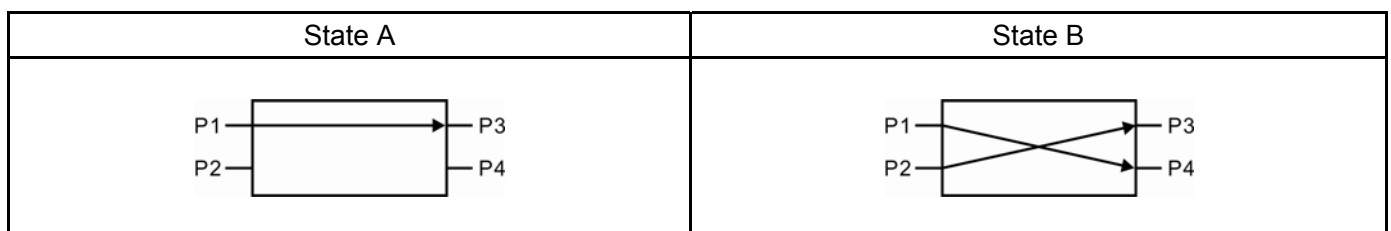**Optical Route:**


**Dimension:**

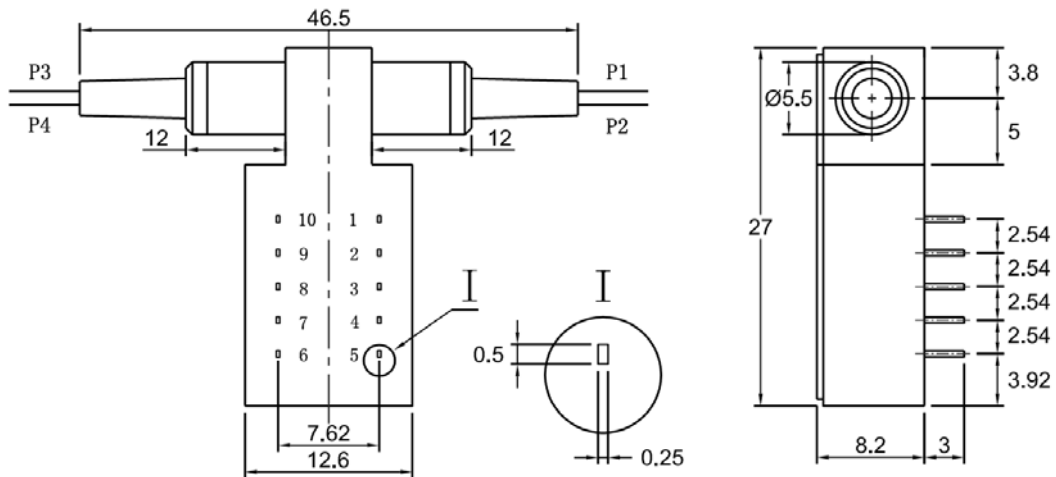

P1: White    P2: Black    P3: Red    P4: Blue

**Electrical Specification:**

Specifications	Voltage	Current	Resistance
5V latching	4.5~5.5 V	36~44 mA	125 Ω
5V non-latching	4.5~5.5 V	26~32 mA	175 Ω
3V latching	2.7~3.3 V	54~66 mA	50 Ω
3V non-latching	2.7~3.3 V	39~47 mA	70 Ω

**Nomenclature:**

**HE-2x2B-A-B-C-D-E-F-G**

A	B	C	D	E	F	G
Fiber Type	Operating Voltage	Switch Type	Test Wavelength	Tube Type	Fiber Length (Include connector)	Connector
SM: SM, 9/125 M5:MM, 50/125 M6:MM, 62.5/125 X: Others	3: 3V 5: 5V	L: Latching N: Non-latching	850: 850nm 1310: 1310nm 1550: 1550nm 1310/1550:1310/ 1550nm X:Others	25:250um 90:900um X: Others	05: 0.5m±5cm 10: 1.0m±5cm 15: 1.5m±5cm X: Others	OO:None FP: FC/PC FA: FC/APC SP: SC/PC SA: SC/APC STP: ST/PC STA: ST/APC LP: LC/PC LA: LC/APC X: Others